



LEPTOSKOP® 2042
Coating Thickness Measurement

KARL DEUTSCH

LEPTOSKOP® 2042

Customised Coating Thickness Measurement



The LEPTOSKOP 2042:
high-performance, up-to-date, affordable



Practical carrying case offers enough space for extensive accessories


Package and scope of supply

LEPTOSKOP 2042	order no. 2042.001
Scope of supply: Gauge with battery, carrying case, user manual, quality test certificate, accuracy report, measurement log, technical literature "Coating Thickness Measurement"	
Basic packages	
Basic package Fe	2042.901
Basic package NFe	2042.902
Basic package Fe/NFe	2042.903
Basic packages include: LEPTOSKOP 2042 with scope of supply and additionally: reference block(s), calibration foil set	
Fe-package: probe 2442.100	
NFe-package: probe 2442.130	
Fe/NFe-package: both probes	

The brand name LEPTOSKOP® represents decades of experience in the development of precise and reliable coating thickness measurement gauges from KARL DEUTSCH.

The advantages of the LEPTOSKOP 2042 are numerous. To find the perfect gauge for your individual need we have developed 3 stages of expansion:

- **The basic gauge** – strong basis for precise measurements
- **The software-module "statistics"** – statistics and more for enhanced requirements
- **The software-module "statistics and data storage"** – for highest demands

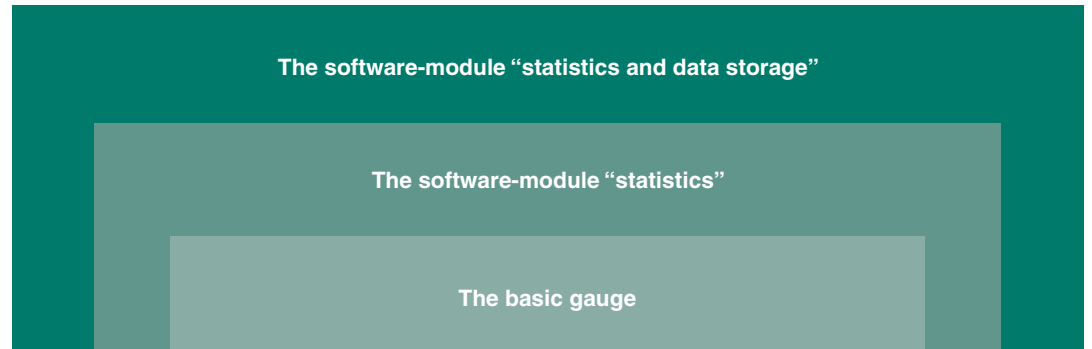

The new LEPTOSKOP 2042 with 3 configuration levels

For all 3 gauges a large range of external probes is available.

All KARL DEUTSCH-probes are "active probes" with built-in microprocessor and signal processing. These probes achieve highest measuring accuracy and repeatability and make the LEPTOSKOP 2042 an universal instrument for all measuring tasks.

The basic gauge – strong basis for precise measurements

The compact basic gauge is ideal for the quick use in non-destructive coating thickness measurement.

Advantages at a glance:

- Precise measurement technique
- Ready to measure without calibration
- Comfortable user guidance in comprehensible plain text
- Clearly arranged graphical display with a bright, but power saving backlight
- Comfortable read off the measured values with big numbers
- Shock absorbing rubber holster with pop-up clip
- Measuring method according to EN ISO 2178/2360 (magnet-inductive and eddy current)
- Modern, small and lightweight
- Hotkeys

Process integration

- Applications in automated processes by data exchange via USB/RS232 interface
- Assistance of the quality management System by logging of the operating hours and the number of total measurements

Economical

- Power supply via 2 commercially available AA-batteries or via USB-connector respectively
- Reserve energy up to 90 hours
- Battery status indication optically and acoustically

Individual

- 10 languages selectable
- Measuring units: µm, mm, mil, inch
- Comprehensive and individual advice by our specialists in the applications lab

The extra flexible and economic LEPTOSKOP 2042 offers the possibility to expand the functionality range anytime by means of an unlock code. Therefore, it is possible to extend the functional benefits e.g. data storage, statistics and further calibration options directly on-site. Any extra costly shipment of the gauge is not necessary.

The software-module “statistics” – statistics and more for enhanced requirements


- All functions of the basic unit are included
- Statistical evaluations with up to 9999 measured values
- Adjustable offset for measured value
- Adjustable limit values
- Variable display modes for an optimal adaptation to the measuring task:
 - All informations viewable at a glance (measured value together with statistical data, minimum, maximum, number of measurements, arithmetic mean, standard deviation)
 - Measured value optionally in analogue presentation
 - Fast navigation within the measured data
 - List of measured data and graphic representation of the course of readings
- Keyboard lock

The software-module “statistics and data storage” – for highest demands

- All functions of the software-module “statistics” are included
- Data storage with easy file management system similar to Windows: Directories and files with alphanumeric naming
- Up to 140 files storable (999 measured values per file; max. 9999 measured values altogether)
- Calibration on unknown layer (Fe)
- Multipoint calibration
- Local average
- All statistical evaluations are available for each file
- Each file stores its individual associated calibration
- For each file, calibrations can be loaded or stored separately
- Real-time clock (date and time)

Package and scope of supply

	order no.
Statistic packages	
Statistic package Fe	2042.911
Statistic package NFe	2042.912
Statistic package Fe/NFe	2042.913
Statistic packages include: LEPTOSKOP 2042 with scope of supply and additionally: module “statistics”, PC-cable (USB), PC-software EasyExport, reference block(s), calibration foil set, Fe-package: probe 2442.100 NFe-package: probe 2442.130 Fe/NFe-package: both probes	
Data packages	
Data package Fe	2042.921
Data package NFe	2042.922
Data package Fe/NFe	2042.923
Data packages include: LEPTOSKOP 2042 with scope of supply and additionally: module “statistics and data storage”, PC-cable (USB), PC-software STATWIN 2002, reference block(s), calibration foil set, Fe-package: probe 2442.100 NFe-package: probe 2442.130 Fe/NFe-package: both probes	

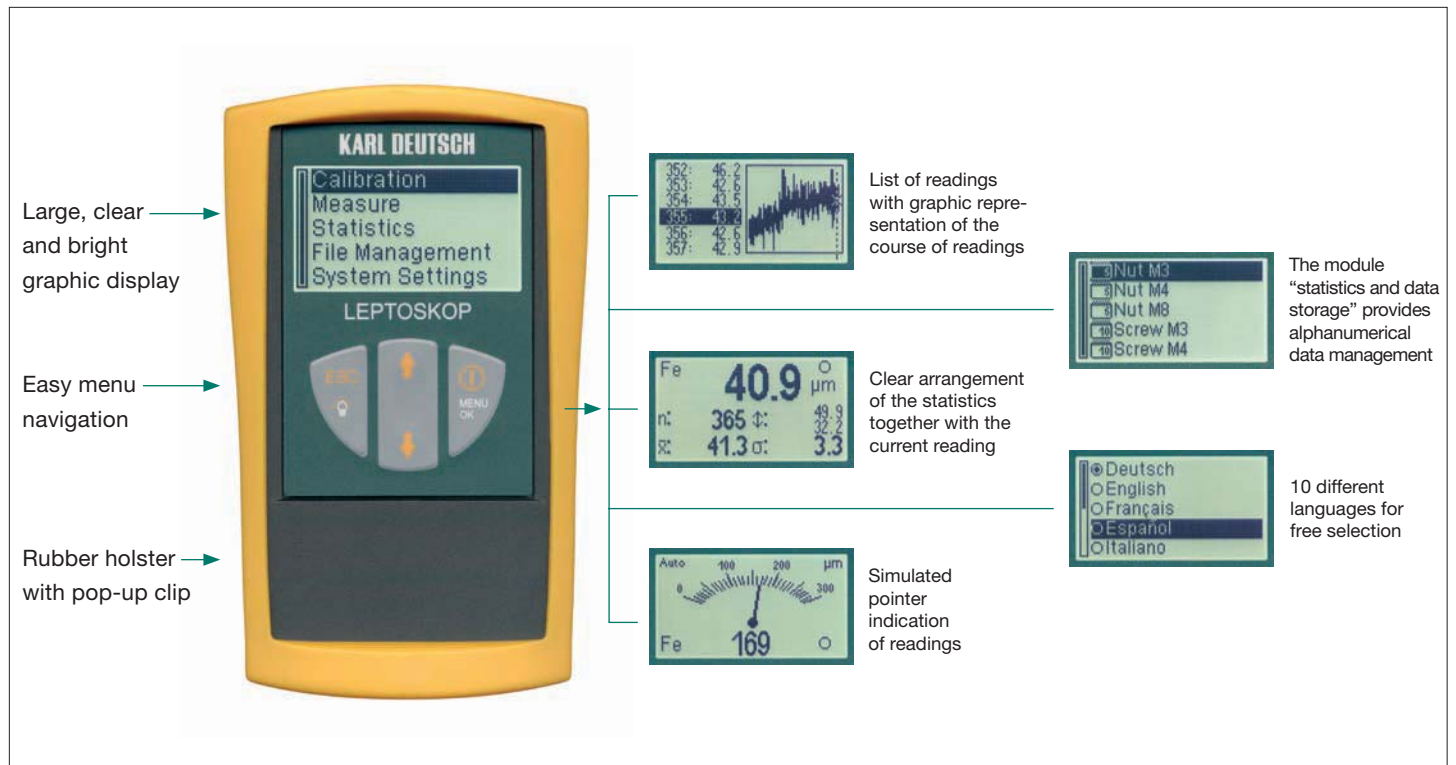

The compact LEPTOSKOP 2042 satisfies with comfortable user's guidance and clear representation of the measured data

LEPTOSKOP-probes

For each measuring task the right solution



Typical application

The LEPTOSKOP 2042 works with external, exchangeable probes, which are designed either for Fe- or NFe-base material. With the help of the following overview it is possible to find the appropriate probe for your measuring task.

Even if the measuring task is getting more difficult our experts will assist and consult you to find the best probe for your individual requirement.

Measuring methods

Magnet-inductive method (EN ISO 2178) for all non-ferrous coatings on ferrous substrate (Fe) e.g. paint, lacquer, powder lacquer, enamel, plastics, zinc, chromium, copper, on e.g. iron and steel.

Eddy current method (EN ISO 2360)

for all non-conducting coatings on (electrically) conductive base material (NFe) e.g. lacquer, paint, powder lacquer, anodized surface, plastics, on e.g. aluminium, copper, brass.

Criteria for an optimal probe selection

- The material combination of coating and substrate. This determines the measuring method.
- The coating thickness. It is substantial for the required measuring range of the probe.
- The geometrical shape and the size of the test item. They determine the probe type: Standard-, micro-, two pole- or special probe; straight or angled.

We also offer special probes for individual measuring tasks.

For each measuring task the right solution:

Probes (dimensions in mm)	Probe Type	Measuring Range	order no.
	probe Fe 0°	0 – 3.000 µm	2442.100
	probe Fe 90°	0 – 3.000 µm	2442.110
	probe Fe S 0°	0,5 – 20 mm	2442.120
	probe NFe 0°	0 – 1.000 µm	2442.130
	probe NFe S 0°	0 – 3.750 µm	2442.140
	two-pole probe Fe	0,5 – 12,5 mm	2442.200
	micro probe Fe 0°	0 – 500 µm	2442.300
	micro probe NFe 0°	0 – 500 µm	2442.310
	micro probe Fe 45°	0 – 500 µm	2442.320
	micro probe NFe 45°	0 – 500 µm	2442.330
	micro probe Fe 90°	0 – 500 µm	2442.340
	micro probe NFe 90°	0 – 500 µm	2442.350


We will assist you with your individual measuring task and offer you the adequate special probe.

LEPTOSKOP® 2042

Accessories

Accessories for LEPTOSKOP 2042

Accessories	Description	order no.
PC-software: STATWIN 2002	This software enables the transfer, analysis, storage and archiving of measured data with the PC. STATWIN takes over the complete index and file structure from the instrument. With the help of the export function it is possible to transfer the measured data to other programs (e.g. MS Excel). For detailed information we recommend our separate product information for STATWIN 2002.	2904.001
PC-software: EasyExport	This software enables the export of single measurements or whole data files into Windows-programs. Via the PC-interface it is possible to transfer the measured data of the KARL DEUTSCH instruments according to your demand into different applications (word processing, spreadsheet analysis, data base, ERP and QM software a.m.m.). For detailed information we recommend our separate product information sheet for EasyExport.	2905.001
Reference blocks	According to the application we offer ferrous (iron) and non ferrous (aluminium) reference blocks.	Reference block Fe, small 2815.001 Reference block Fe, large (for two pole probe and standard probe Fe S 0°) 2815.002 Reference block NFe 2815.003
Calibration foils Calibration block	Foils with precise thickness for reliable and accurate calibration of the LEPTOSKOP. Depending on the measuring range there are different foil sets deliverable.	Foil set 0 up to 1250 µm (6 ea) 2715.001 Foil set 1250 up to 4750 µm (3 ea) 2715.004 Foil set 0,5 up to 12,5 mm (4ea) 2715.002 Precision calibration foil set (6 ea) 0 – 1250 µm 2715.003 Plastics calibration block, 15 mm thick 2715.151
Probe Positioning device	It can be used for all Fe- and NFe-micro probes and comes with a pneumatically damped wire-operated manipulator for highly accurate repetitive positioning. Corresponding fixtures are also included for the 0°, 45°- and 90°-micro probes.	2820.002
Positioning aid for micro probes	These aids help to avoid wrong measuring data caused by inclination or twisting of the probes during measurement.	Positioning aid 0°: 2998.001 Positioning aid 45°: 2998.002 Positioning aid 90°: 2998.003
Probe holder	300 mm length for probe Fe 90° /two-pole probe Fe	2808.001
Mobile thermal printer	RS232, incl. mains-/charging adapter (230 V); connection of the printer to the LEPTOSKOP 2042 via "PC-cable" for RS232 interface (order nr. 1657.311)	6010.201
PC-cable	Cable for connecting the LEPTOSKOP 2042 to a PC/laptop/printer with serial interface For RS232 interface For USB interface (incl. driver-CD)	1657.311 1657.312
Battery set Charger unit	NiMH-rechargeable battery set, 2 x 1.2 V (size AA, with enhanced capacity: 2000 mAh min.) Charger unit 230 V for up to 4 NiCd/NiMH-rechargeable batteries (4 x AA)	6016.001 6015.001
Protective bag	Leather case with viewing window for display and keypad, mechanical protection and handling of the instrument if used without rubber holster.	4825.001
Technical literature	NDT – compact and understandable No. 12 "Coating Thickness Measurement" (included with scope of supply)	6607.121

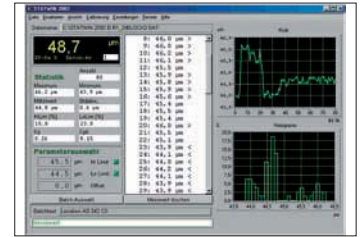

STATWIN 2002-operating interface



PC-software: EasyExport



Calibration foil sets and reference blocks



Probe positioning device



Positioning aid for micro probes



Mobile thermal printer

LEPTOSKOP® 2042

Technical data

Technical data LEPTOSKOP 2042	
Display	Approx. 48 mm x 24 mm, back light illumination
Measuring methods	Fe-measuring: magnet-inductive method (EN ISO 2178) NFe-measuring: eddy current method (EN ISO 2360)
Measurement range	0 – 20000 µm, depending on probe used
Calibration	<ul style="list-style-type: none">• Zero calibration• Single and multi-point calibration with foils on uncoated base material• Calibration on coated material (Fe), if no uncoated material is available• Factory calibration• Loading and saving of customized calibrations
Measuring uncertainty (after calibration)	For coatings < 100 µm: 1 % +/- 1 µm For coatings > 100 µm: 1 to 3 % +/- 1 µm For coatings > 1000 µm: 3 to 5 % +/- 10 µm For coatings > 10000 µm: 5 % +/- 100 µm
Interface	USB/RS232 via adaptor cable
Measurement units	µm, mm, mils or inch
Storage	Up to 140 files, 999 measured values per file, Overall: max. 9999 measured values less approx. 100 measured values per generated file
Statistics	Minimum, maximum, arithmetic mean, number of data, standard deviation Limit value monitoring Local coating thickness and average coating thickness according to EN ISO 2808
Date and time	Real-time clock, battery backed
Power supply	2 x AA-batteries, USB or mains adapter respectively
Operating hours	<ul style="list-style-type: none">• Approx. 90 hrs. with backlight off (with alkali-manganese-primary cells)• Approx. 45 hrs. with backlight on (with alkali-manganese-primary cells)
Battery level indicator	4-stage battery level indicator An audible warning signal occurs approx. 2 to 4 hours before undervoltage condition automatic shut-off at undervoltage
Operating temperature	0 °C to +45 °C
Storage temperature	-20 °C to +60 °C without batteries 0 °C to +45 °C with batteries
Housing dimensions and weight	81 mm x 121 mm x 32 mm, approx. 150 g (with batteries, without rubber holster)
Dust and humidity protection	Protection class IP 40 (protection against intrusion of particles > 1 mm)
Probe electronic	Active probe with built-in microprocessor and signal processing

KARL DEUTSCH Prüf- und Messgerätebau GmbH + Co KG
Otto-Hausmann-Ring 101 · D-42115 Wuppertal · Germany
Phone (+49 -202) 7192-0 · Fax (+49 -202) 7149 32
info@karldeutsch.de · www.karldeutsch.de

DIN EN ISO
9001:2000
certified

KARL DEUTSCH